

Application

Downlights for loft insulation, residential buildings, office, living rooms, houses, hotels. etc.

Evolite LED downlight equivalent to 50W-90W halogen downlights and achieve energy savings of up to 85%, IP44 bathroom rated, including dust and splashing water. It's suitable for a diversity of applications and emits pleasant basic lighting in general building sections, corridors, reception areas, conference rooms and traffic zones. To make installation simple, the downlight features a 'loop in & loop out' system which allows you install multiple units together by mains wiring.

Lumen: 450lm-700lm





Jeco Gyro Isoguard, a downlight with Isolation Safebox, which can be covered by thermal insulation and works with airtight building regulations.

230V AC 50Hz

UGR 19

Air-tight



















Application

Downlights for loft insulation, residential buildings, office, living rooms, houses, hotels. etc.

- Features & Benefits
 · Air-tight, BBC RT2020
- · Suitable for direct insulation cover
- · Gyro 350° rotation with +/-20° tilt
- · Suitable for low profile ceiling(36mm in height)
- · IP44 Front/IP20 back
- · Phase-cut dimmable compatible with most of dimmers
- · Dim to warm available
- · Easy wiring with push-fit connectors
- · Die-casting aluminum body and bezel
- · Super compact LED driver
- · Full finger protection avoid hotspot

Powered By

LEDGEAR®











Optics Beam Angle: 38°,60°





Correlated Color Temperature:







Color Rendering Index:



Ceiling thickness 1-13mm cut-out



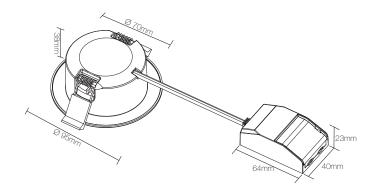



| K&L Code | Power(W) | Lumen(Im) | Ra | Beam Angle(°) | Dimming | Finish | Cutout(mm) | DxdxH(mm) |
|--------------|----------|-----------|----|---------------|---------|--------|------------|-----------|
| 4.DL.177.N01 | 6.5 | 700 | 82 | 38, 60 | Triac | WH/BK | 75-83 | 95x70x38 |
| 4.DL.177.N02 | 4.5 | 450 | 82 | 38, 60 | Triac | WH/BK | 75-83 | 95x70x38 |
| 4.DL.177.N03 | 6 | 580 | 82 | 38, 60 | Triac | WH/BK | 75-83 | 95x70x38 |



Professional • Unique • Comfortable LED LIGHTING & CONTROL

E-mail: sales@kinglumi.com • Http://www.kinglumi.com • Tel: 0086-755-29516789 Office: 5F. Bldg 2, Nangang 3rd ind. Zone, Tangtou,Shiyan, Bao'an, Shenzhen P.R.C 518108 Factory: Bldg 3, Nangang 3rd ind. Zone, Tangtou,Shiyan, Bao'an, Shenzhen P.R.C 518108

